


INTERROLL HIGHSPEED POPUP ST 5446

Product description

The Highspeed Popup diverts unit loads in 30° or 45° angles to a continuing conveyor line without interrupting the flow.

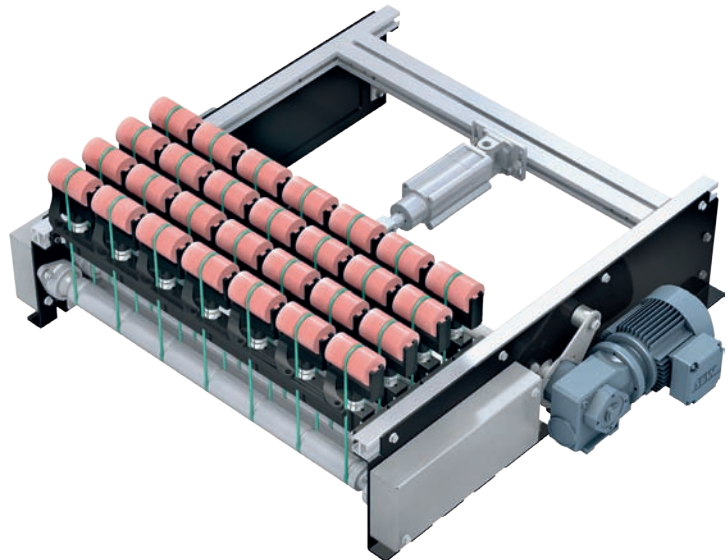

This product is designed according to the demands of your application. Please consult your Interroll customer consultant for further information.

Technical Data

General technical data	
Max. load capacity	50 kg
Max. start-up current	4,000 items/h (depending on material)
Ambient temperature	+5 to +40 °C
Dimensions	
α Angle	30° / 45°
Suitable conveyor modules	Belt Conveyors Roller Conveyors
Drive	
Conveyor roller drive	400 V gear motor
Conveyor roller pivoting movement	Pneumatic cylinder

Scope of supply: The module is fully assembled