



RM 8140

Interroll Roller Conveyor
Omni Wheel Table
Non-Powered

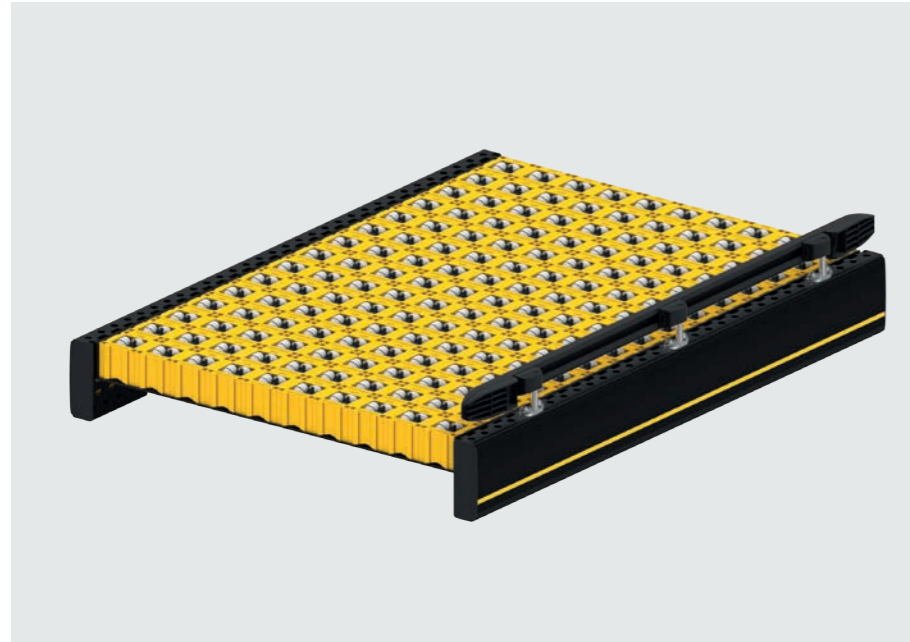

Dimensions

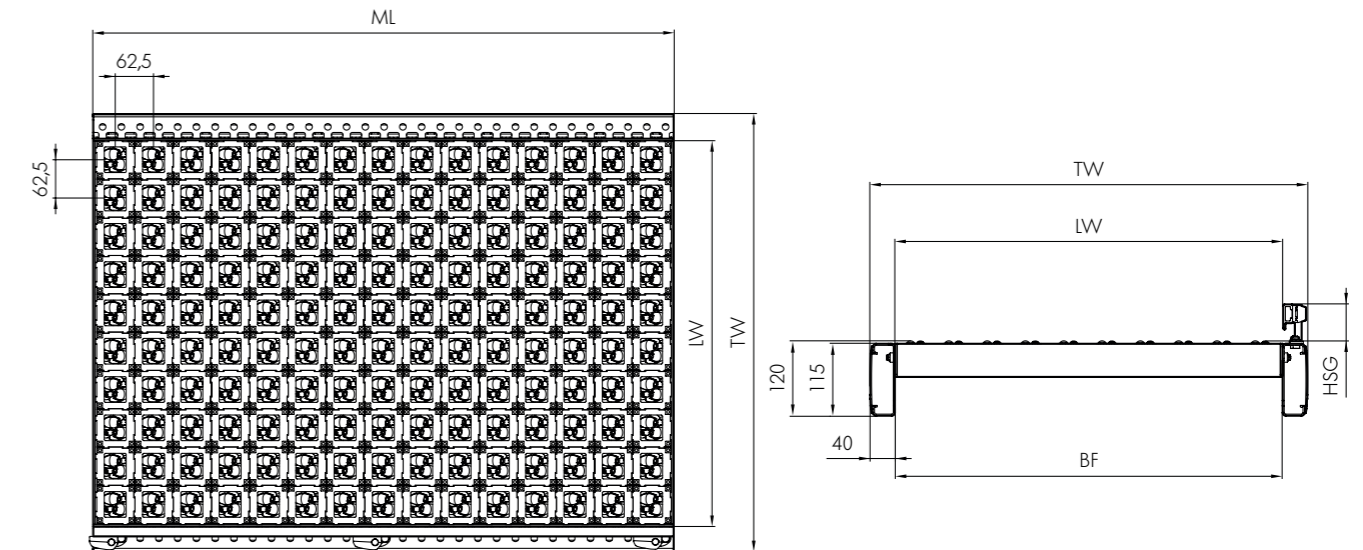

Product Description

The omni wheel table with multi-directional wheels is particularly well suited for workstation and inspection areas and for materials with soft bottoms that can be moved in all directions with very little force.

Technical data

| | | |
|------------------------|---------------------|----------------------------------|
| General technical data | Max. load capacity | 60 kg/m |
| | Incline/decline | Not suitable |
| | Ambient temperature | -5 to +50 °C |
| Roller | Roller type | Interroll Series 2800 |
| | Roller diameter | 48 mm |
| | Roller material | Polyamide, polypropylene housing |

| | | |
|-----|-------------------|--|
| BF | Between frames | 420, 620, 840 mm others on request |
| LW | Lane width | BF (+120/-90 mm per side with flexible side guide) |
| ML | Module length | Max. 2040 mm |
| TW | Module width | BF + 80 mm |
| P | Pitch | 62.5 mm |
| HSG | Height side guide | 35 - 65 mm |

Scope of supply

- The module is fully assembled
- Please order support stands and end caps separately